

FISHING BUMPER SUB

DESCRIPTION

The Fishing Bumper Sub is designed to withstand repeated downward or upward blows in most any standard fishing applications.


USE

Positioned in the fishing string immediately above the fishing tool, torque may be transmitted by standard string rotation to facilitate engagement or disengagement of the fishing tool from the fish.

Caution should be taken with the length in open position which varies from 10" to 20" according to the size of the tool.

STANDARD SPECIFICATIONS

| | | | | |
|-----------------------------|------------|-------------|-------------|---------------|
| Outside Diameter | 3-1/8" | 4-3/4" | 6-1/4" | 7-3/4" |
| Inside Diameter | 1" | 1-1/2" | 2-1/4" | 3-1/2" |
| Connection | 2-3/8" REG | 3-1/2" IF | 4-1/2" IF | 6-5/8" REG |
| Max. Tensile Strength Yield | 22 490 lbs | 581 100 lbs | 864 400 lbs | 1 060 000 lbs |

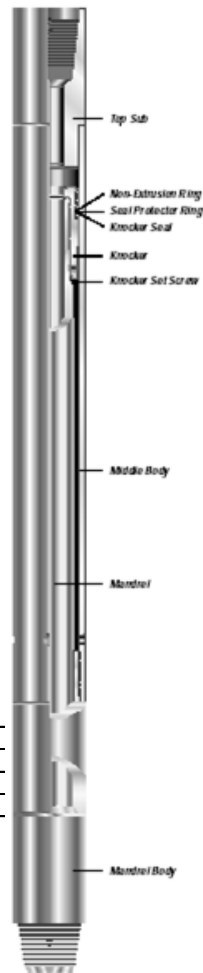

YOU MAY ALSO BE INTERESTED BY :

- Fishing Jar Z
- Fishing Jar Intensifier
- Shock Tool